

21.5" 23.6" FHD HD-SDI CCTV Monitor

AUSPICE STAR



WHY CHOOSE HD-SDI?


When applied to the security industry, HD-SDI allows full HD 1080P video to be transmitted over standard RG-59 coaxial cable with BNC connectors. Unlike IP, there are no bandwidth limitations or video lag. One can now obtain FHD image without having to replace cable or deal with the complexity of IP.

Features

- Multi-inout interface: HD-SDI, HDMI, Composite BNC, VGA
- FHD display 1920 x 1080
- Excellent contrast ratio and brightness
- Built-in 3D comb-filter & 3D de-interlace
- VESA hole 100 x 100 (mm)
- PIP / PBP Multi-display function
- 2 x Composite BNC In / Out for looping
- Remote supported
- No Mercury. Environment-friendly Product
- LED backlit leads to less power consumption

Model	A215C1-SDI	A236C1-SDI
General		
Diagonal size	21.5"	23.6"
Panel type	TFT LCD	TFT LCD
Aspect ratio	16:9	16:9
Number of pixels	1920 x 1080	1920 x 1080
Pixel pitch	0.24825 x 0.24825 mm	0.2715 x 0.2715 mm
Color depth	16.7 Million Colors	
Backlight	LED	LED
Optical [typ.]		
Brightness	300 cd/m2	300 cd/m2
Contrast ratio	10000:1	10000:1
Response time [Tr + Tf]	5 ms	5 ms
Viewing angle	Vertical -85°~85° / Horizontal -80°~80°	
Operation		
Input Interface	BNC x 1, HDMI x 1, VGA x 1, SDI x 1	
Output Interface	BNC x 1, SDI x 1	
Display mode	Video / PC / HDMI / SDI	
OSD	Picture Mode, Contrast, Brightness, Color, Tint, Sharpness, Color Temp, DNR	
OSD Languages	English, German, French, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech	
Speaker	1.5 W x 2	
Remote control	YES	
Composite Video		
System	PAL / NTSC	
Video processing	Motion Adaptive 3D De-Interlacer and DNR, 4H Comb filter Y/C separation	
Electrical		
AC power	AC 100-240V 50/60HZ	
Power consumption	< 33W	< 36W
Power supply	External power adapter	
Mechanical		
Case material	Plastic	
Dimension (W x H x D) (include stand)	524 x 398 x 164 mm	580 x 428 x 164 mm
Support	Pedestal base	
Mounting interface	100 x 100 mm, M4 x 4 holes	
Net weight (Monitor & stand)	4.0Kgs (8.8 lbs)	4.6Kgs (10.1 lbs)
Environment		
Temperature	Operation: 0°~40°C(32°~104°F), Storage: -10°~60°C(14°~140°F)	
Humidity	10%-90%	
Safety	FCC, CE, ROHS	
Delivery set	Monitor, Power cord with adapter, VGA cable, Remote controller, User Manual	

** Design and specs are subjective to change without notice

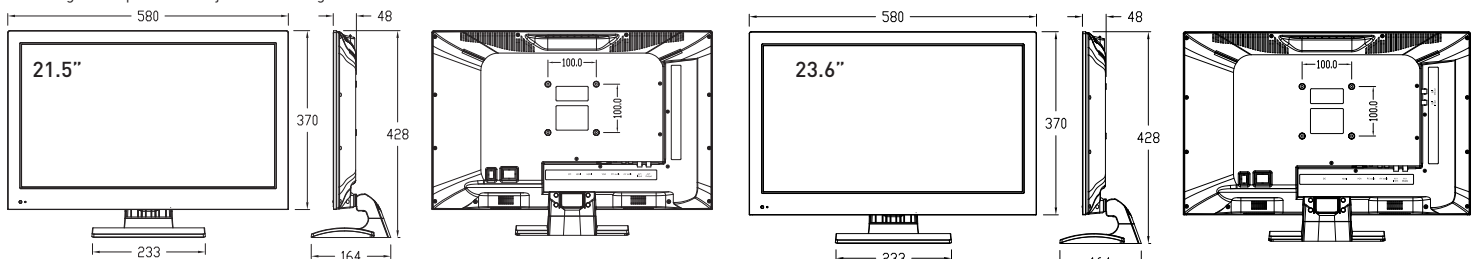

Unit: mm

AUSPICE STAR

Company address: 2F., No.330, Datong Rd., Gueishan Township, Taoyuan City, Taoyuan County 33352, Taiwan, R.O.C.

Tel: +886-3-350-1555 Fax: +886-3-350-1388