


9.7-inch LED Monitor in metal cabinet



SPECIAL FEATURES

- Indurtrail standard metal housing
- 1024 x 768 resolution, 400 Nits, 700 : 1 Contrast Ratio
- Lower power consumption
- 4:3 aspect ratio, an ideal display for CCTV professional
- Mercury free, more environmentally friendly design
- Better color performance
- 3D Comb Filter

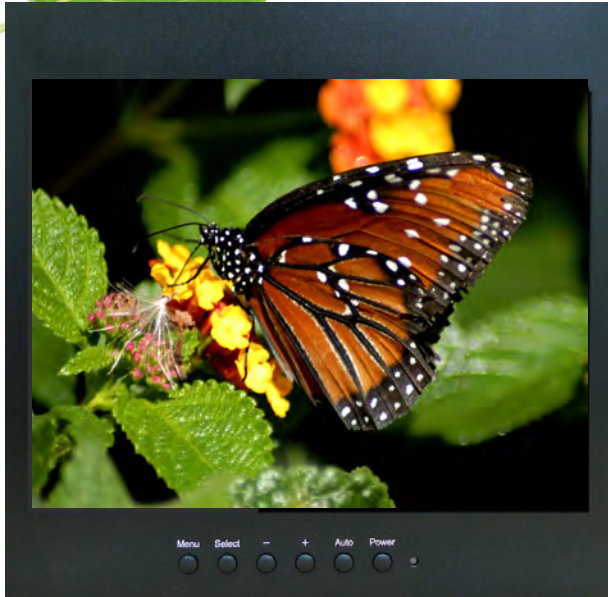


Dual-display type

Stand-alone specification

| Model | |
|--|---|
| General | |
| Diagonal size | 9.7" |
| Panel type | TFT LCD |
| Aspect ratio | 4:3 |
| Number of pixels | 1024 x 768 |
| Pixel pitch | 0.192 x 0.192 mm |
| Color depth | 262K Colors |
| Backlight | LED |
| Optical (typ.) | |
| Brightness | 400 cd/m2 |
| Contrast ratio | 700:1 |
| Response time (Tr + Tf) | 30 ms |
| Viewing angle | Vertical -89°-89° / Horizontal -89°-89° |
| Operation | |
| Input Interface | BNC x 2, VGA x 1, HDMI x 1 |
| Output Interface | BNC x 2 |
| Display mode | Video 1 / Video 2 / PC / HDMI |
| OSD | Picture Mode, Contrast, Brightness, Color, Tint, Sharpness, Color Temp, DNR |
| OSD Languages | English, German, French, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech |
| Speaker | YES |
| Remote control | NO |
| Composite Video | |
| System | PAL / NTSC |
| Video processing | Motion Adaptive 3D De-Interlacer and DNR, 4H Comb filter Y/C separation |
| Electrical | |
| AC power | AC 100-240V 50/60HZ |
| Power consumption | 15W Max. in "ON" Mode |
| | Under 0.5W in Power Saving Mode [100 Vac] |
| | Under 0.5W in Power Saving Mode [240 Vac] |
| Power supply | External power adapter |
| Mechanical | |
| Case material | Metal |
| Color | Black |
| Dimension [W x H x D] | 223X221.4X47mm |
| Support | Wall mount ; Flush Mount |
| Net weight (Monitor & Rack mount) | 2.1 kg |
| Environment | |
| Temperature | Operation: 0°-40°C[32° - 104°F], Storage: -10°-60°C[14° - 140°F] |
| Humidity | 10%-90% |
| Standards | |
| Safety | FCC, CE, ROHS |
| Pixel defect policy | ISO13406-2 Compliant, LCD panel class 2 |
| Delivery set | |
| Monitor, Adapter, VGA cable, User Manual | |

Dimension

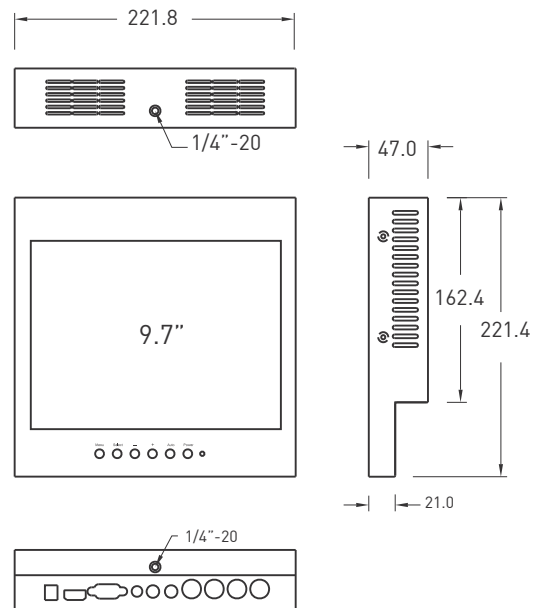

I/O

