



Description:

Industrial standard harsh-duty All-Weather Monitor is engineered to survive the most demanding applications. Designed to be rugged, the monitor handles a wide-range of extreme environments making it the industry choice for mobile applications. Housed in a milled billet aluminum case, the slim-profile monitor is light weight and watertight, with fully sealed connectors.


FEATURE

- High quality Aluminum bezel
- IP67 standard waterproof & dustproof, ideal for outdoor environment
- High brightness 1,000nit LED Panel
- Protected glass
- Thin and light-weight design
- Unique waterproof HDMI cable
- Optional touch screen

Specifications:

Model	A19M5-LED
General	
Monitor	Waterproof Monitor
Diagonal size	19"
Panel type	TFT LCD
Aspect ratio	5:4
Number of pixels	1280 x 1024
Pixel pitch	0.294 x 0.294 mm
Color depth	16.7 Million Colors
Backlight	LED
Optical (typ.)	
Brightness	1000 cd/m2
Contrast ratio	10000:1
Response time ( Tr + Tf)	5 ms
Viewing angle	Vertical -80°~80° / Horizontal -80°~80°
Operation	
Input Interface	BNC x 1, VGA x 1, HDMI x 1
Display mode	Video / PC / HDMI
OSD	Picture Mode, Contrast, Brightness, Color, Tint, Sharpness, Color Temp, DNR
OSD Languages	English, German, French, Italian, Spanish, Russian, Turkish, Polish, Dutch, Czech
Additional modes	NO
Speaker	NO
Remote control	YES
Composite Video	
System	PAL / NTSC
Video processing	Motion Adaptive 3D De-Interlacer and DNR, 4H Comb filter Y/C separation
Electrical	
AC power	AC 100-240V 50/60HZ
Power consumption	40W Max. in "ON" Mode Under 3W in Power Saving Mode (100 Vac) Under 5W in Power Saving Mode (240 Vac)
Power supply	External power adapter
Mechanical	
Case material	Metal
Color	Black
Dimension ( W x H x D)	442 x 363 x 53 mm
Mounting interface	100 x 100 mm , M4 x 4 holes
Net weight (Monitor only)	7.6kgs(16.8lbs)
Environment	
Temperature	Operation: 0°~40°C(32° ~104°F) , Storage: -10°~60°C(14° ~140°F)
Humidity	10%-90%
Standards	
Ingress protection level	IP67
Safety	FCC, CE, ROHS
Pixel defect policy	ISO13406-2 Compliant, LCD panel class 2
Delivery set	Monitor, Power cord with adapter, VGA cable, BNC cable, HDMI cable, User Manual

Dimensions

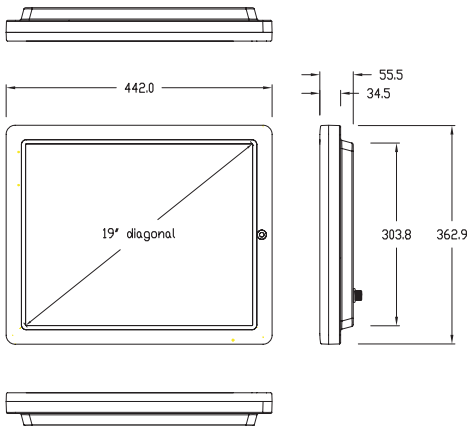

Unit:mm

Input / Output

